


ELASTIFLEX



AIR CELL® PADS

Cone-shaped patented rubber supports with internal air chambers. Guarantee uniform elastic response and balance to the system.

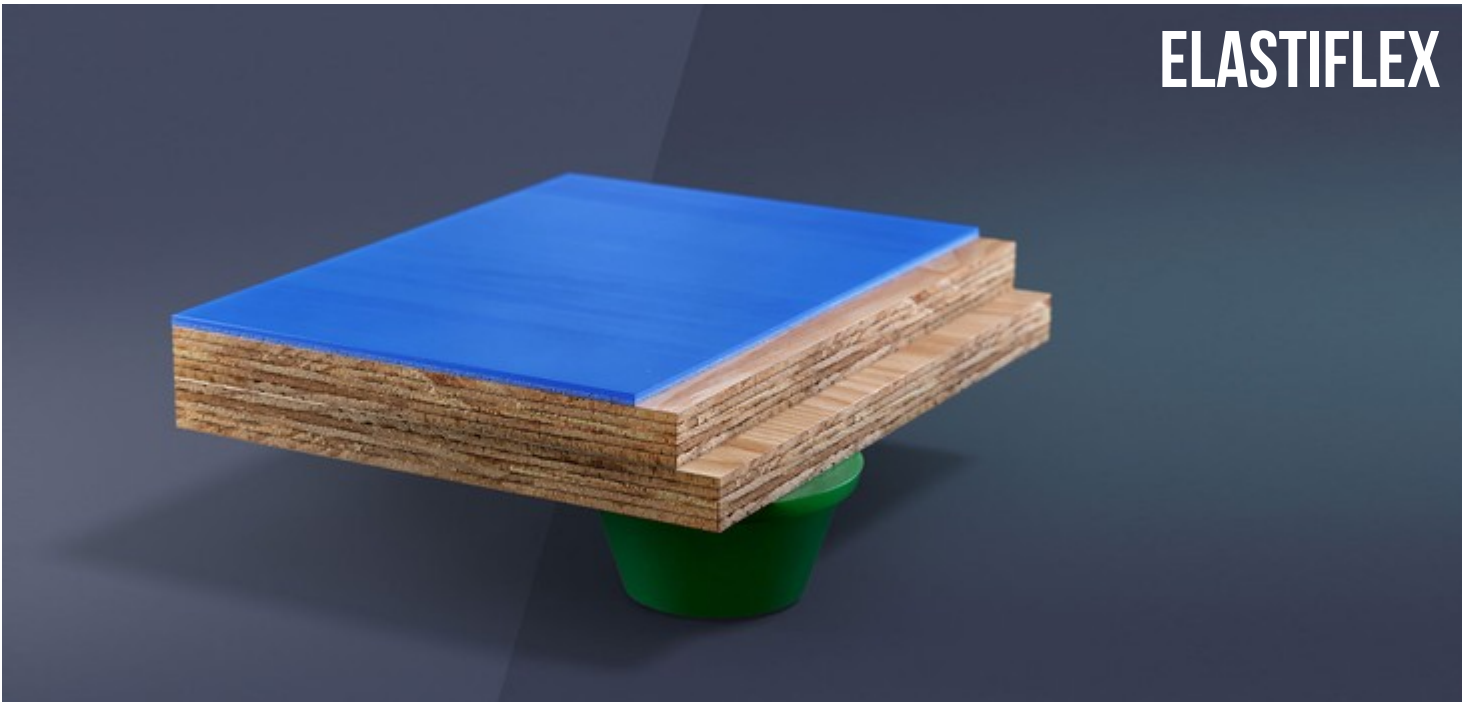

SMOOTH SOLID RUBBER TOP LAYER

Vulcanized rubber surfaces with a smooth finish, for indoor installation. Thanks to its properties, under dry conditions, the rubber naturally ensures a superficial grip, without any need for additional embossing.

ELASTIFLEX

Combo-elastic sports flooring formed of two interlinked layers of phenolic plywood, screwed and glued together. MONDOFLEX, a flooring made from calendered and vulcanised natural rubber, is installed on the surface.

The underside of the Elastiflex system features special patented elastic supports with a truncated cone design. The supports have the capacity to absorb even the most violent impact and revert to their original position thanks to the inner air chamber.

The elastic supports are fixed in place according to a special layout designed to ensure uniformity of response across the entire surface.

The Elastiflex system has obtained the CE label and complies with European standard EN 14904, and the requirements of international sports federations.

DIMENSIONS

THICKNESS

56,5 mm

WEIGHT

15,75 kg/m²

COLOR RANGE




MF61 MAPLE




MF21



MF25



MF40




MF10




MF18




MF33



MF30



MF62



MF90



MF70



CERTIFICATIONS

FIBA Certificate of Approval for Wooden Flooring Category, Level 1, 2 and 3

IHF 2017 Certificate of Approval for Synthetic Floorings
