


STOBIPLAY

1-layer system / EPDM

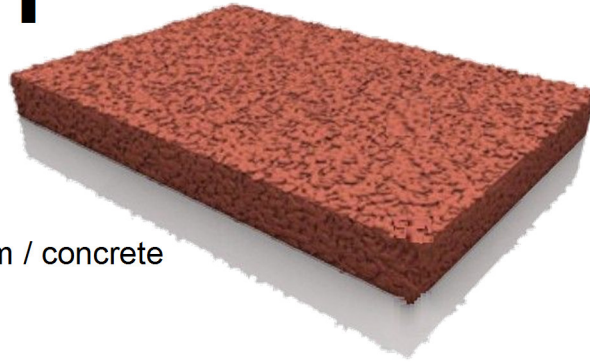

Support porous macadam / concrete unbound bases

	Product	Quantity kg/m ²
Primer	Stobielast® S 100.00 or Stobielast® S 080.00 (1 component) on asphalt and concrete supports	0.15 kg
Surface 10 mm	Stobielast® S 135.00 or Stobielast® S 131.87 (1 component) EPDM rubber 1-3 mm or EPDM rubber 1-4 mm	1.80 kg 9.00 kg
Total thickness		around 10 mm

The total thickness of the system can be increased by multiplying the material consumption with the appropriate factor (e. g. 1.5 for a 15 mm thick system).

In case the surface layer will be build in light colours (light blue, light grey, white etc.) we recommend to use lightfast binders. Please consult our technical service.

Applications Multisport facilities

Test Reports & Certificates EN 14877: 2013 : European Sport Specifications
DIN18035 Part 6 : Environmental compatibility

Stockmeier Uréthanes France SAS
8, Rue de l'Industrie
Z.I. Est
68700 Cernay
FRANCE
T +33 (0)3 89 75 70 70
F +33 (0)3 89 75 70 81
snad@snad.fr
urethanes.fr@stockmeier.com
www.stockmeier-urethanes.com

Issue October 2014